



Driver: Robert Chapman Class: LM ☐ Flat ☒ Banked Run Line: 219
 Track: _____ Driving Style: Smooth ☐ Surface: Smooth ☒ ☐ ☐ ☐ ☐ Bumpy
 Event: Chili Bowl Aggressive ☐ Traction: High ☐ ☐ ☐ ☐ ☐ ☐ Low

Tires

	Brand/Name	Compound	Insert
RF	QS		Stock
LF	QS		Stock
RR	QS		Stock
LR	QS		Stock

Cleaned With:

water

Traction Additive:

PB


Notes:

Tires sanded down

Shocks - ☐ Small Bore ☒ 12mm Big Bore

	Body Length	Shaft Length	Spring	Oil	1.6 Shock Piston	Shock Length	Collar	Spring Cup
RF	S M ☒	S M ☒	Yellow	40	☒ M ☐ T	20.5	11	☒ Ext.
LF	S M ☒	S M ☒	Green	40	☒ M ☐ T	20.5	9	☒ Ext.
RR	S M ☒	S M ☒	Purple	35	☒ M ☐ T	22	6.7	☒ Ext.
LR	S M ☒	S M ☒	Gray	35	☒ M ☐ T	23.5	7.3	☒ Ext.

Measure the length of the exposed shaft with the shock fully extended.
 Go to lighter oil or larger piston if tires are skidding over bumps in track.
 Go to heavier oil or smaller piston if tires or car is bouncing.



Ride Height

LF	<u>20</u>	RF	<u>20</u>
LR	<u>21</u>	RR	<u>21.5</u>

Max Chassis Height

LF		RF	
LR		RR	

Corner Weights

LF	<u>13.02</u>	RF	<u>12.98</u>
LR	<u>19.84</u>	RR	<u>17.18</u>

Rear % 59

Left % 52


Wedge % 52

Measured From: ☒ Bottom of Chassis ☐ Top of Chassis

Total Weight: 63.02

☐ Measured without body

Front Suspension

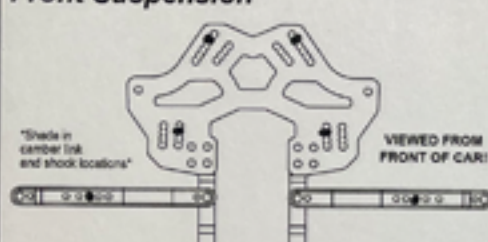

Kick-Up	☐ 25° ☒ 30° ☐ 35°
Toe	<u>.10 out</u>
Sway Bar	☒ None ☐

Rear Suspension



Outdrives / Diff.	☒ Steel ☐ Alum ☐ Gear
Slipper	☒ Yes ☐ No

Left	Right	Left	Right
<u>+1</u>	<u>-1</u>	<u>12 in</u>	<u>0</u>
☐ 0 ☐ 1 ☒ 2 ☐ 3 ☐ 4	☐ 0 ☐ 1 ☒ 2 ☐ 3 ☐ 4	☐ Inner ☒ Outer	☐ Inner ☒ Outer
☒ None ☐ .060 ☐ .125 ☐ Short ☒ Middle ☐ Long	☒ None ☐ .060 ☐ .125 ☐ Short ☒ Middle ☐ Long	☐ 1.5° ☐ 3°	☒ None ☐ 1.5° ☐ 3°
☒ Upper ☐ Lower	☒ Upper ☐ Lower	☒ Inner ☐ Outer	☒ Inner ☐ Outer
		<u>8.0</u>	<u>8.0</u>

Aerodynamics

Body: MR KUSTOMS Mail Man
 Back of Main Deck to Body Post Center: _____
 Rear Deck Height from Bottom of Chassis: 4 in
 Spoiler Length: 1.5
 Spoiler Angle: 35° Wickerbill: .60

Electronics

Motor: Exalt 7.0 Speed Control: _____ Battery Position: _____
 Amp Draw: _____ Timing/Boost: _____ ☐ Left ☒ Center
 Timing: 35 Drag Brake: _____ FOD ☒ ☐ ☐ ☐ ☐ ☐
 Pinion: 26 Battery: Exalt 5700
 Spur: 81 Motor Position: ☒ Mid ☐ Rear

Notes: Has LR Brass Hub.
7mm Foam bump stop in RT front shock.